
NOTE:

1. All dimensions are in mm.
2. All connectors are shown in face view
3. 100% Electrically Tested.

| SrNo | MPN | Length (mm) |
|---|---|---|
| 1 | 2412D-9666-175-434-0100 | 1000±25 |
| 2 | 2412D-9666-175-434-0200 | 2000±25 |
| 3 | 2412D-9666-175-434-0300 | 3000±50 |
| 4 | 2412D-9666-175-434-0500 | 5000±50 |
| 5 | 2412D-9666-175-434-1000 | 10000±100 |

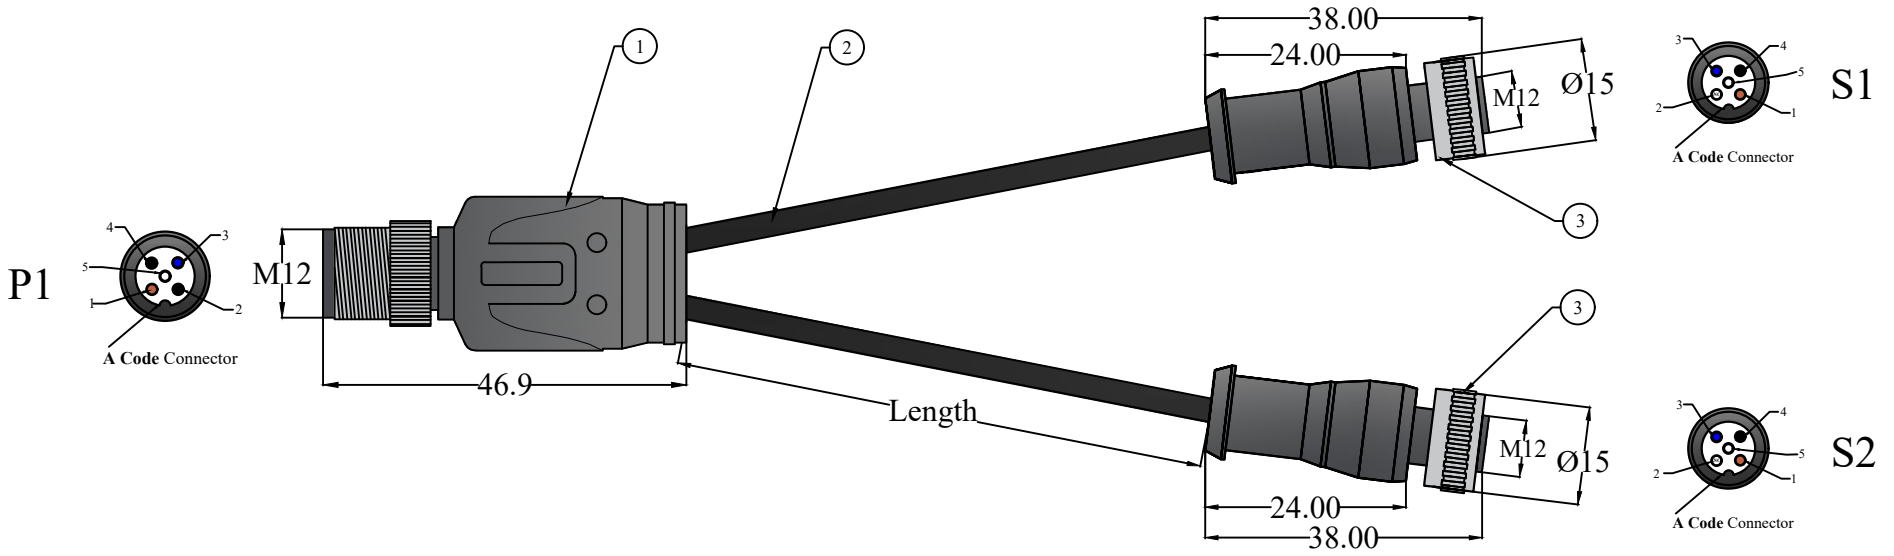


| SR NO. | Descriptions |
|---|---|
| 1 | M12 A Code Male Straight 5 Pin Y Distributor |
| 2 | 4 Core * 0.34 sqmm, PUR Un-shield-B Jacket Cable, 5.0±0.2 sqmm, Core-color Brown, White, Blue, Black |
| 3 | M12 A code Female Straight 5 Pin Connector |

## Pin Configuration

| S1 (M12 A Code Female Connector) | P1 (Male Connector) | S2 (M12 A Code Female Connector) |
|---|---|---|
| 1-Brown | 1-Brown | 1-Brown |
| 2-NC | 2-Black | 4-Black |
| 3-Blue | 3-Blue | 3-Blue |
| 4-Black | 4-Black | 2-NC |
| 5-White | 5-White | 5-White |

| Rev no. | Rev date | Description | Changed By | Checked By |
|---|---|---|---|---|
| | | | | |
| | | | | |

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.

LEI INDIA'S

| | | | |
|---|---|---|---|
| DRAWN BY | S. K | DATE | 18/07/26 |
| CHECKED BY | M. S | DATE | 18/07/26 |
| APPROVED BY | J. S | DATE | 18/07/26 |

DRAWING TITLE
Y-Distributor M12 Male / M12 Female Straight A Code Pur Unshielded Black Cable

| SIZE | DRAWING NUMBER | REV |
|---|---|---|
| A4 | 2412D-9666-175-434-XXXX | 00 |

| SCALE | UOM: MM | | SHEET |
|---|---|---|---|
| 1 : 1 | | | 1/1 |